

# RGP60

## Output Rating - 50 HZ

Voltage, Frequency	Prime	Standby
230/400V, 50HZ	60 KVA 48 KW	66 KVA 52.8 KW

## Output Rating - 60 HZ

Voltage, Frequency	Prime	Standby
230/400V, 60HZ	65KVA 52 KW	71.5 KVA 57.2 KW

## Output Rating - 60 HZ

Voltage, Frequency	Prime	Standby
277/480V, 60HZ	70 KVA 56 KW	77 KVA 61.6 KW



Rating at 0.8 power factor

Image for illustration purposes only.

## Features

Engine	Perkins , 1103A-33TG2 , Made in UK, in accordance to ISO3046 ,ISO8528,DIN6271
Alternator	Stamford UCI224E / S1L2Y , Made in UK, OR Le Roy Somer TAL TAL042H made in Europe complying to the norms: BS EN60034/ BS 5000/ VDE 0530/ NEMA MG 1-32/ IEC 34/ CSA C22.2-100/AS 1359
Control Panel	DeepSea Made in UK complying to the norms: comply to the norms BS EN 61000, BS EN 60950, BS EN 60068
Base Frame	Black steel with Anti-vibration pads, Built in fuel tank
Sound Proof Canopy	Modular SPC, Powder Coated, Extremely Durable, Designed to Reduce Sound Level with Maximum Service Accessibility and Minimum Foot Prints
Worldwide Support	RG Power Products are distributed through its RG Power International Network

## Rating Definitions and Conditions

Prime Rating	The power available for an unlimited hour usage with an average load factor of 80% of the published prime power over each 24 hours period. A 10 % overload is available for 1Hr every 12 hours.
Standby Rating	The power limited to 500 hours annual usage with an average load factor of 80% of the published standby power rating over each 24-hour period. Up to 300 hours of annual usage may be run continuously. No overload is permitted on standby power.


**Engine Perkins, 1103A-33TG2, 4 Stroke Cycle, Diesel**

<b>Structure</b>	<b>Number of Cylinders</b>	3	
	<b>Engine Build</b>	In line	
	<b>Bore</b>	105 mm	
	<b>Stroke</b>	127 mm	
	<b>Displacement</b>	3.3 L.	
	<b>Compression Ratio</b>	17.25/1	
	<b>Aspiration</b>	Turbocharged	
	<b>Cooling</b>	Water cooled	
<b>Fuel</b>		<b>1500 RPM</b>	<b>1800 RPM</b>
	<b>Fuel Tank</b>	Built in fuel tank 94L for 6.6 hours operation @ full load	Built in fuel tank 94L for 6hours operation @ full load
	<b>Fuel System</b>	Direct injection	
	<b>Fuel Recommended</b>	N°2 Diesel	
	<b>Fuel System Make (ECM)</b>	-	
		<b>1500 RPM</b>	<b>1800 RPM</b>
	<b>Delivery Flow Rate (l/hr)</b>		
	<b>Fuel Consumption</b>		
	<b>100% Load (g/kWh-L/hr)</b>	217 (14.1)	205 (15.7)
	<b>75% Load (g/kWh-L/hr)</b>	213(10.4)	217.3 (12.5)
	<b>50% Load (g/kWh-L/hr)</b>	224 (7.3)	227 (8.7)
	<b>Cooling system</b>	<b>Engine Coolant Capacity</b>	10.2L
<b>Air Flow-Radiator</b>		1483.3 l/s	1850 l/s
Radiator with 50 degree ambient			
Cooling Package & Air Cleaner Kit			
Thermostatically-controlled system			
<b>Air Inlet</b>	<b>Air Intake Engine (Clean Filter/Dirty)</b>	5 / 8 Kpa	
<b>Exhaust System</b>	<b>Exhaust Gas Temperature (Prime)</b>	557 °C	534 °C
	<b>Exhaust Gas Flow (Prime)</b>	168.29 l/s	196.6 l/s
	<b>Maximum Exhaust System Back Pressure</b>	10 kPa	10 kPa
	<b>Muffler</b>	residential (20→25 dB)	industrial(15→25 dB)
	Stainless Steel exhaust flex-fittings		
<b>DC System-Starting/Charging</b>	<b>Cranking Battery Voltage</b>	12 V	
	<b>Battery Charging Alternator</b>	65 A	
	Dc Voltage Monitoring via control		
<b>Heat Rejection (prime)</b>	<b>Radiated Heat to Ambient (Prime)</b>	1 kW	11 kW
	<b>Heat Rejection to Coolant (Prime)</b>	35 kW	41 kW
	<b>Heat Rejection to Exhaust (Prime)</b>	41 kW	52 kW
	<b>Heat Rejection to intercooler</b>	0	52 kW
<b>Lube System</b>	<b>Lubricating System Oil Capacity</b>	7.9 L	
<b>Governor</b>	Mechanical		

**Alternator Stamford , UCI224E / S1L2Y or Le Roy Somer TAL042H**

<b>Structure</b>	<b>Insulation System</b>	Class H	
	<b>Winding Pitch</b>	2/3 to minimize harmonics effects	
	<b>Number of Poles</b>	4	
	<b>Number of Bearings</b>	Single bearing	
	<b>Winding Leads</b>	12	
	<b>Power Factor</b>	0.8	
	<b>Over Speed Capability (% of Rated)</b>	2250 Rpm (150%)	
	<b>Wave Form Distortion</b>	<b>THD(Total Harmonic Distortion)@ No load &lt; 5.0%</b>	
	<b>Telephone Interference</b>	TIF < 2%	
	<b>IP Rating (Protection)</b>	IP23	
	<b>AVR</b>	Excitation with auxiliary coil	
	Synchronous, 3 phase, Brushless & Self ventilated		
		<b>1500 rpm</b>	<b>1800 rpm</b>
<b>Power Switching</b>	3-P Circuit Breaker, MCB	100A	100A
<b>Temperature</b>	<b>Temperature Rise</b>	125/40 °C	
<b>Control &amp; Voltage Regulator</b>	<b>Control System (Standard)</b>	Self excited	
	<b>Voltage Regulator (AVR)</b>	SX460 or AS540	
	<b>% Of Voltage Regulation</b>	± 1.0 %	
<b>Motor Starting Capacity@30% Voltage Dip</b>	if voltage 230/400V	TBA	
	if voltage 277/480V	TBA	

**Standard Controller, DeepSea 6110**

<p><b>Control</b></p>	<p>Fuel tank monitoring            Emergency Stop Pushbutton/ Alarm Acknowledge            Engine Cool Down Timer            Warm-up Timer            Load Switching Timer            Engine Cycle Crank</p>	
<p><b>Indications</b></p>	<p>Operating Hours            3 Phase Generator Voltage Sensing &amp; Monitoring            Current Protection &amp; Monitoring            Power Measurement (kW, kVA, kVA<sub>r</sub>, kWh, kVAh, kVA<sub>r</sub>h, pf)            Frequency Monitoring (Hz)            Oil Pressure/Coolant Temperature/Fuel Level Monitoring            Battery Voltage Monitoring (DC)            Alarm Acknowledge</p>	
<p><b>Warning &amp; Shutdown Alarms</b></p>	<p>Generator Over/Under Voltage &amp; Frequency            Crank Disconnect (Failure to Start)            Under/Over Speed            Over Current            Low oil pressure            High Water Temperature            Low Fuel Level            Low Water Level</p>	
<p><b>Features</b></p>	<p>IP 65 (if ordered with gasket)            Basic Scheduler            8-35 VDC Supply            Digital Inputs(4)- Outputs(4 MPU/ 6 CAN)            Event Log (5 shutdowns)</p>	





**Optional Accessories**

<p><b>Alternator</b></p>	<p>AVR (3 phase Sensing)            Reactive Droop            Winding Temperature Detectors            Anti- Condensation Heaters            Excitation with auxiliary exciter</p>	
<p><b>Warning &amp; Shutdown Alarms</b></p>	<p>4-P Circuit Breaker            Special Brands (ABB- MG- Siemens...)            Motorized Operation            Shunt Trip            Under Voltage Trip UVT            Residual Current Protection            Ground Fault Protection            Earthing Kit            Surge Arrestor</p>	

Optional Accessories (continues)	
<b>Engine</b>	<b>Fuel</b> Micro-Diesel Filter for Micro-Particles Filtration Automatic Fuel Refilling System Fuel Water Separator <b>(2000/5)</b> Mechanical Fuel Level Kit Oversize Fuel Tank Upon Custom Requirements Fuel Tanks-Pipes Heater Optional Built in fuel tank 180 L operation full load (Height will be increased by 100 mm and weight by 20 kg)
	<b>Air Inlet</b> Sy-klone Air Cleaner Installed @ Air Intake System
	<b>Exhaust</b> Muffler: Critical (25→30 dB) Hospital (35→40 dB) Elbow, Flanges, Expanders & Y Adaptors
	<b>Cooling / Heating</b> Radiator with 35 °C or 60 °C Ambient Capability Jacket Water Heater
	<b>Lube</b> Manual Sump Drain Pump Semi-Rotator Hand Pump
	<b>DC System - Starting/Charging</b> Mains Battery Charger 12 V DC-5A Battery Charger 10A-20A on Request Automatic Battery Charger on Request Battery Disconnect Switch DC/AC Current Monitoring (Ammeter) Oversize Battery
<b>Control Panel</b>	DSE 7310/7320/7410/7420-More Inputs & Outputs-Advanced Communications Features; DSE 8610/8710/8810- Load Share Module; Digital & Analogues Inputs Module DSE 2130 (for 7000 Series & Above); Analogue Inputs advanced Module DSE 2131-2133(for 7410 &Above); Digital relay Outputs Module DSE 2157 (for 7000 Series &Above); Analogue Outputs Module DSE 2152 (for 7410 & Above); Local & Remote enunciator Module DSE 2548 (for 7000 Series & Above); Display Modules DSE 2510/2520 (with 7310-7320); Remote Monitoring via: Web Interface (All Series), GSM (for 7000 Series & Above), RS485 (for 7000 Series) Dry Contacts Alarm Indication for Customer Use Audible Alarm (Option for 6010/20; Standard for 7000 Series & Above); Voltage Adjust Potentiometer; Speed Adjust Potentiometer;

Dimensions & Weights

	Length (mm)	Width (mm)	Height (mm)	Weight Dry (Kg)
Open set (NB)	1700	1050	1040	952
SPC Type S	2300	1050	1300	1327

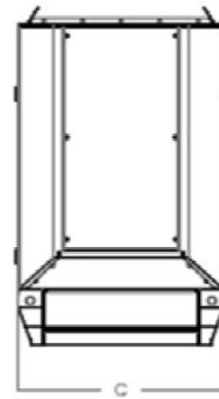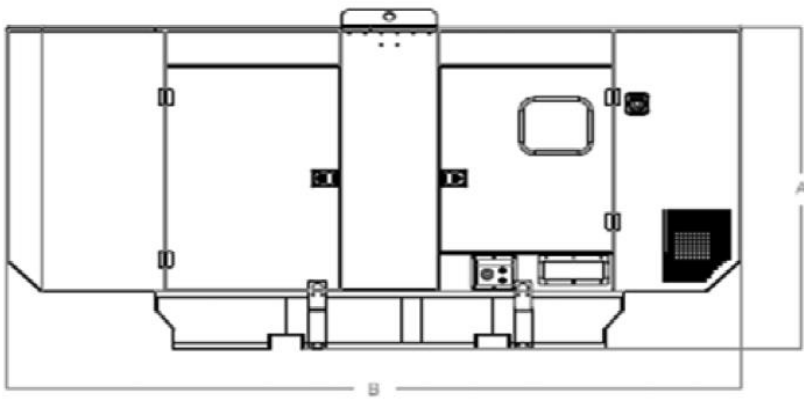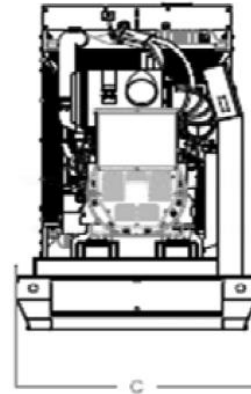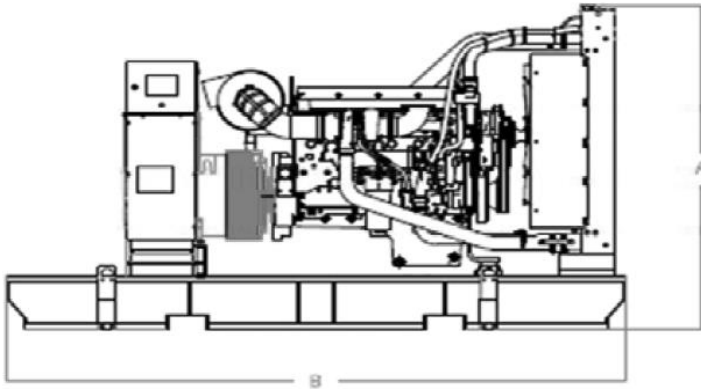

Design for illustration purposes only.

In line with our policy of continuous product development, we reserve the right to change specification without notice.